




Characteristics curves

Susol

Circuit breakers with thermal-magnetic trip units




TD100

FTU
FMU
16~100A

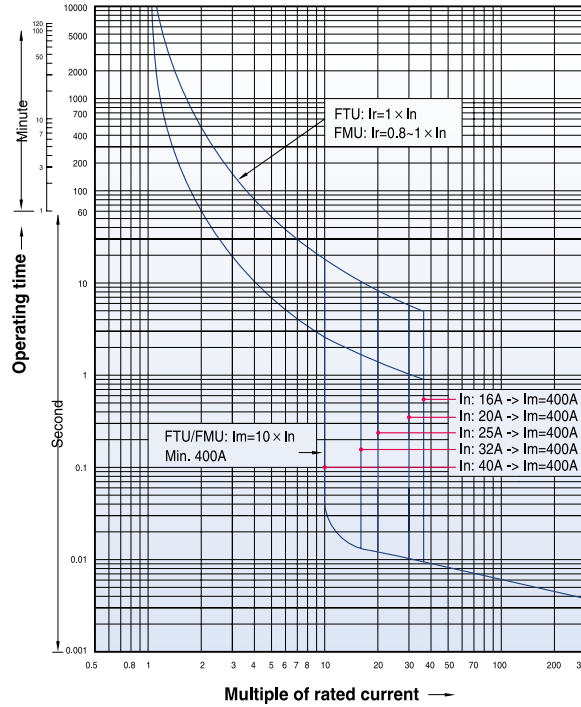

TD160

FTU
FMU
100~160A

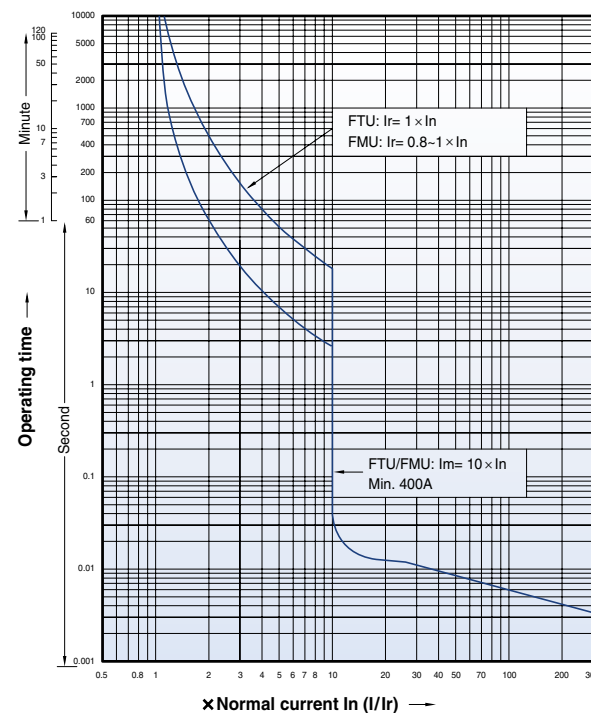




Characteristics curves

Susol

Circuit breakers with thermal-magnetic trip units

TS100

FTU
FMU
40~100A

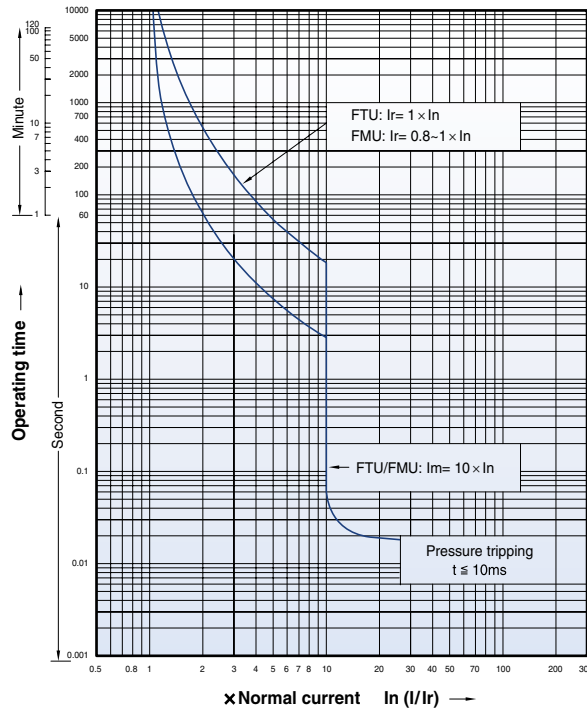


Circuit breakers with magnetic only trip units

TS100

Magnetic only
MTU
1.6~100A

TS160

Magnetic only
MTU
32~160A

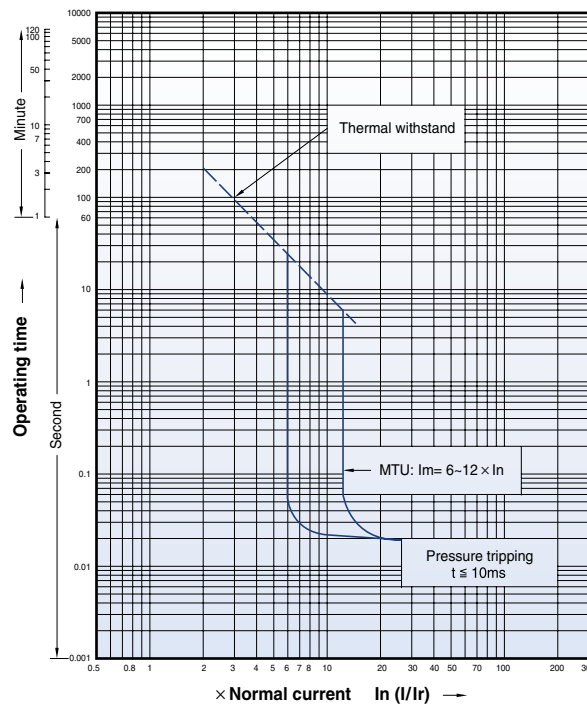




Characteristics curves

Susol

Circuit breakers with thermal-magnetic trip units




TS160

FTU
FMU
100, 125, 160A

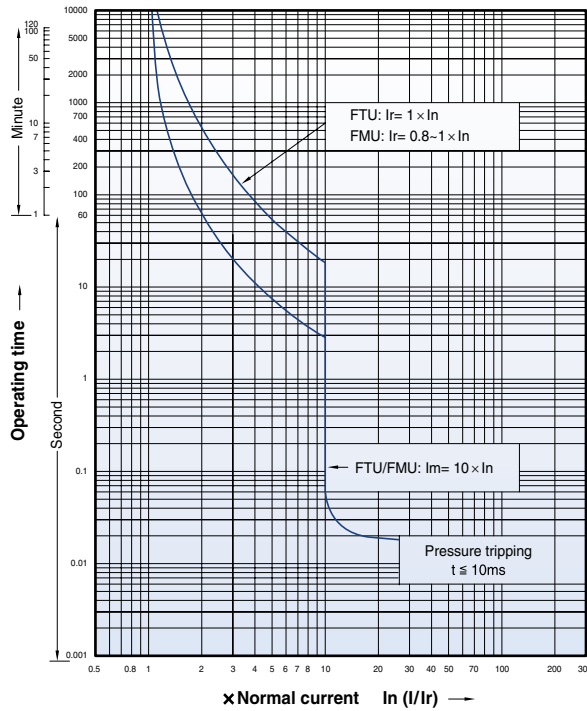

TS160

ATU
100, 125, 160A

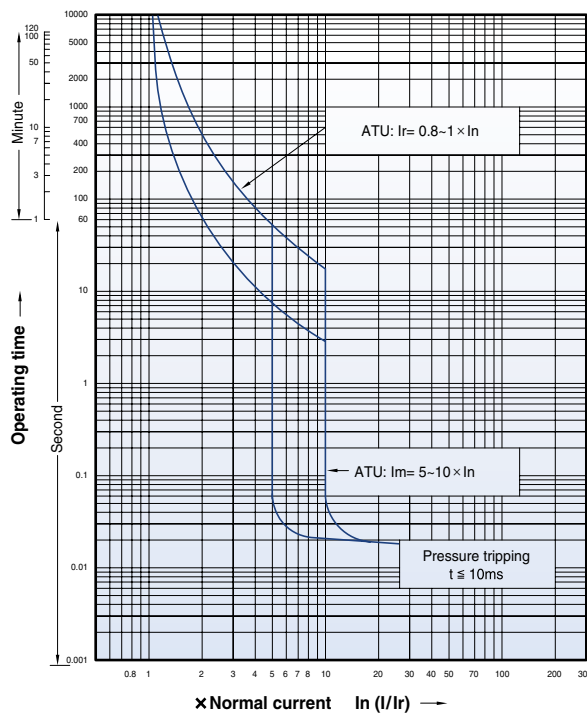




Characteristics curves

Susol

Circuit breakers with thermal-magnetic trip units




TS250

FTU
FMU
125~250A

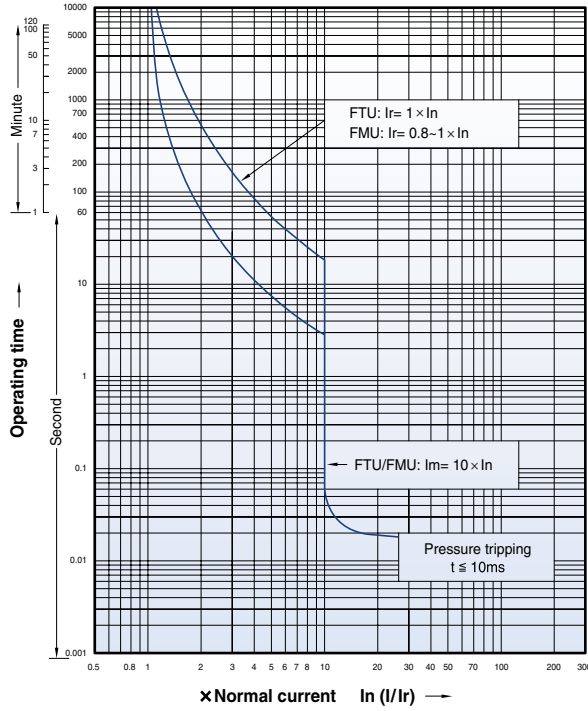

TS250

ATU
125~250A

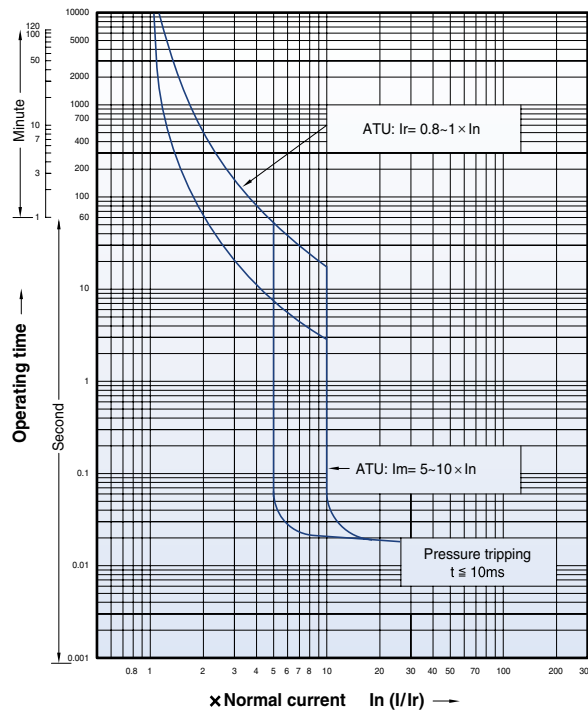


Characteristics curves

Susol

Circuit breakers with magnetic only trip units

TS250




Magnetic only
MTU
100, 160, 220A

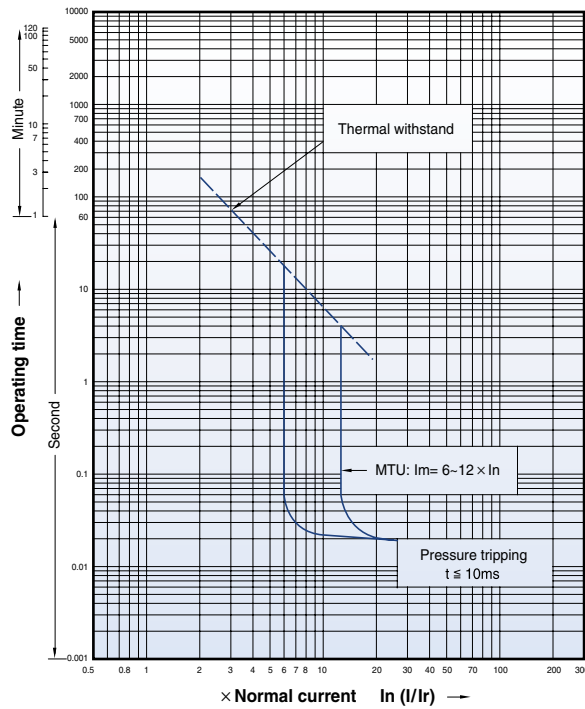

Circuit breakers with thermal-magnetic trip units

TS400

FTU
FMU
300, 400A



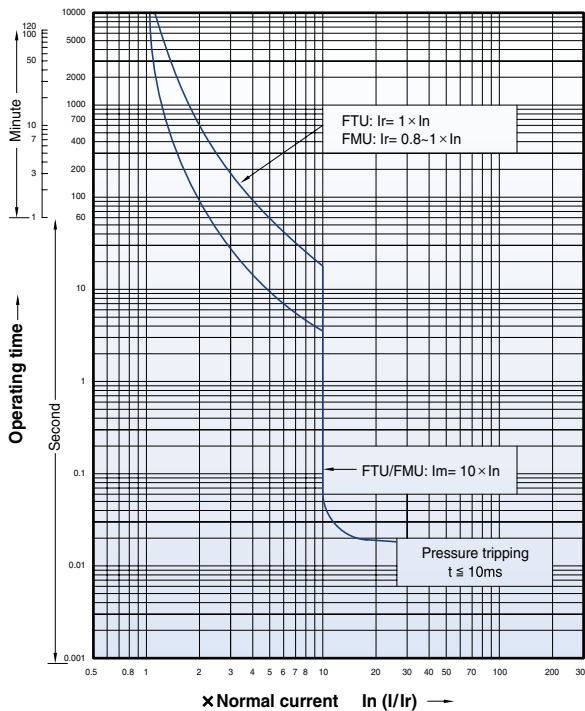


Characteristics curves

Susol


Circuit breakers with thermal-magnetic trip units

TS400
ATU
 300, 400A

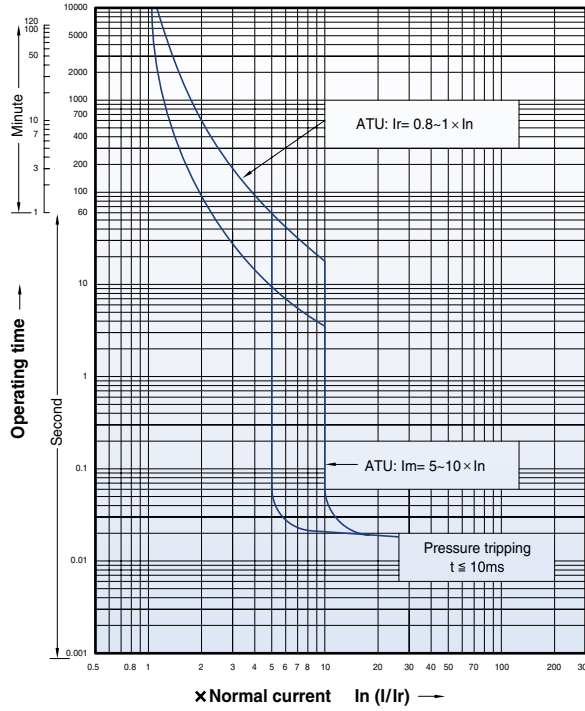

Circuit breakers with magnetic only trip units

TS400
MTU
 320A

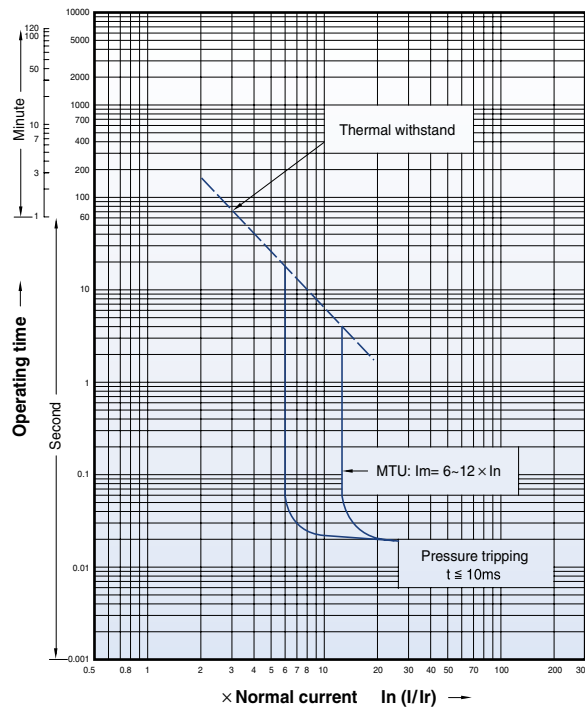




Characteristics curves

Susol

Circuit breakers with thermal-magnetic trip units




TS630

FTU
FMU
500, 630A

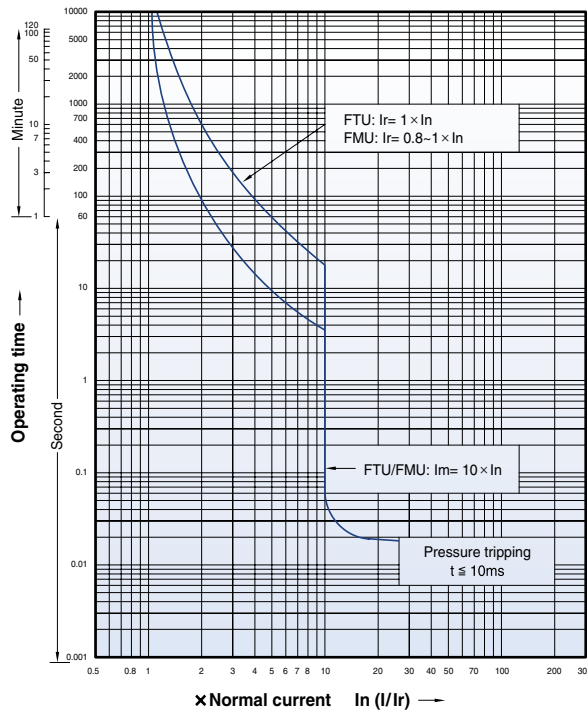

TS630

ATU
500, 630A

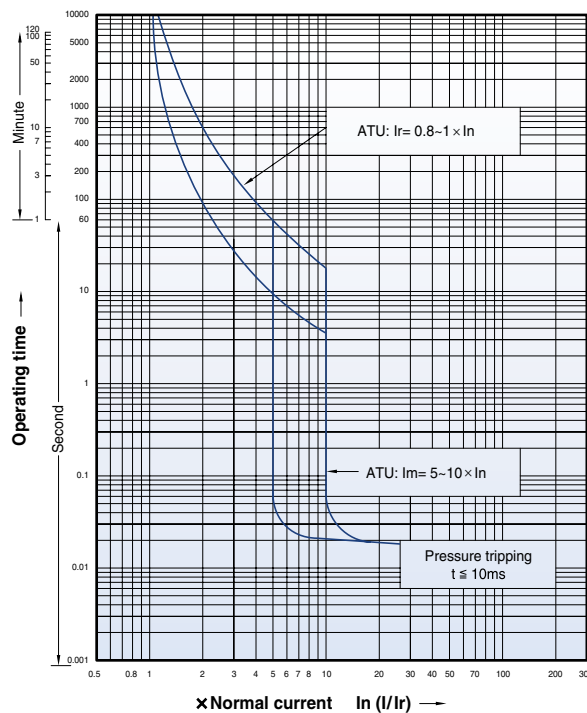


Characteristics curves

Susol

Circuit breakers with magnetic only trip units

TS630

MTU
500A



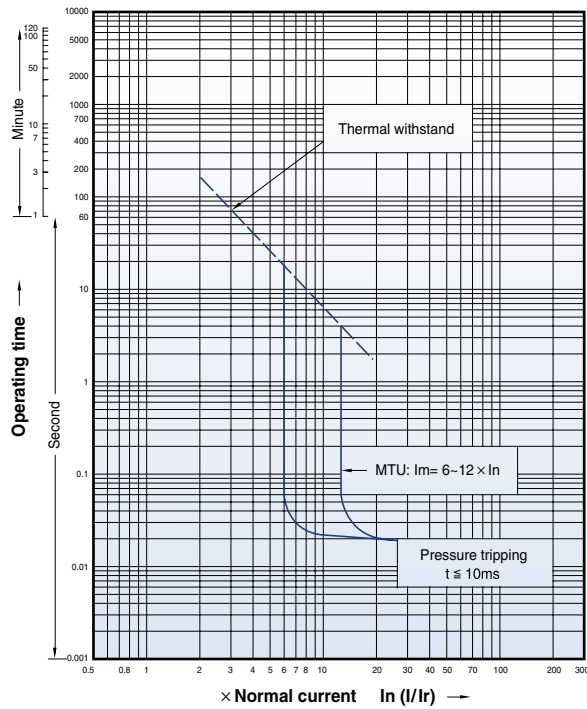


Circuit breakers with thermal-magnetic trip units

TS800

FTU
700, 800A

FMU
800A

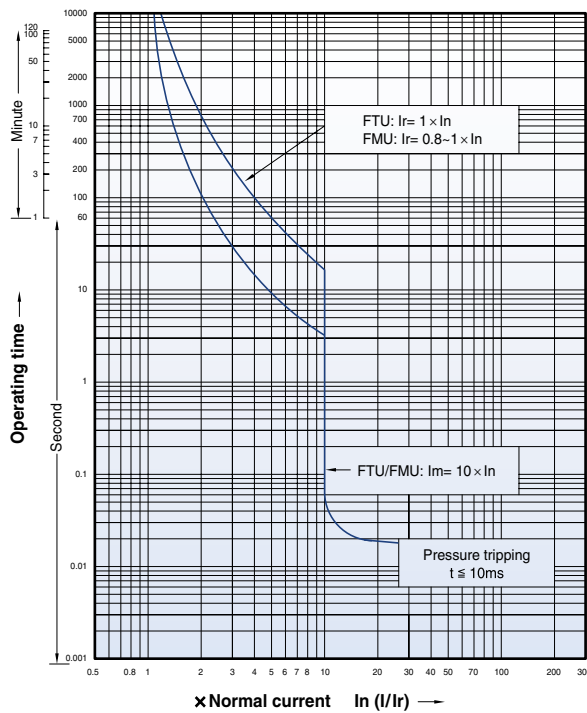




Characteristics curves

Susol

Circuit breakers with thermal-magnetic trip units

TS800


ATU
800A

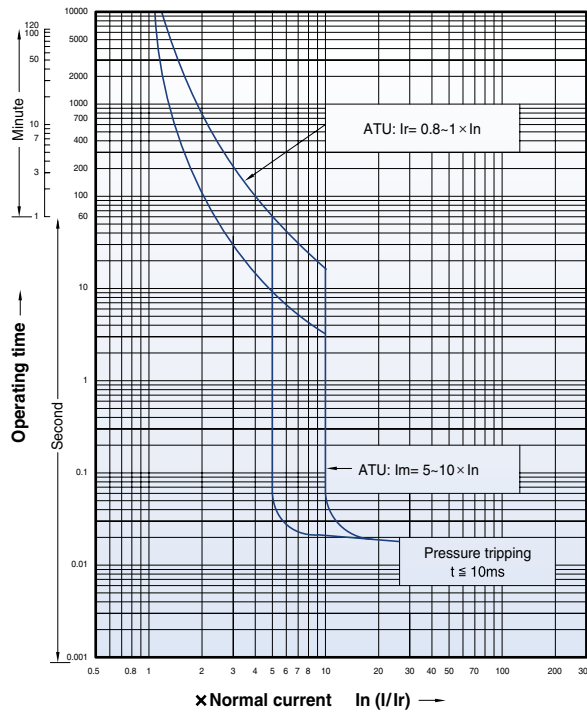

Circuit breakers with magnetic only trip units

TS800

MTU
630A

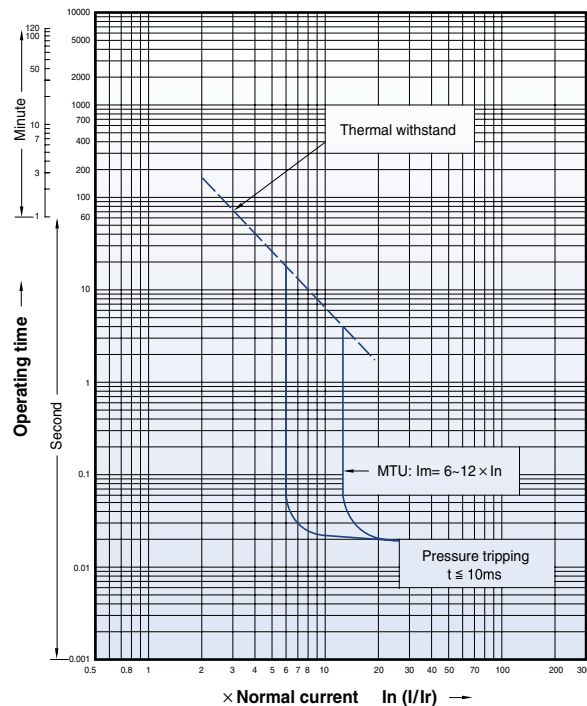


Characteristics curves

Susol

Circuit breakers with electronic trip unit (ETS)

TS100 to TS800

- ETS23
- ETS33
- ETS43

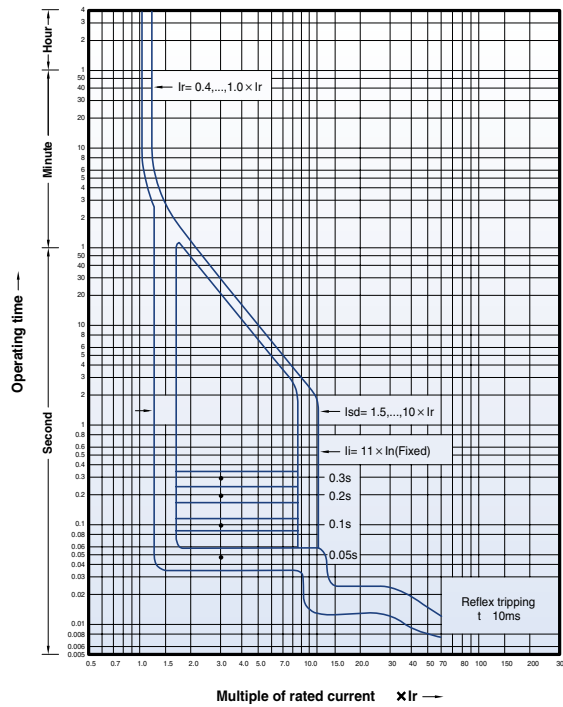


Circuit breakers with electronic trip unit (ETM)

TS400

TS630

TS800

- ETM33
- ETM43

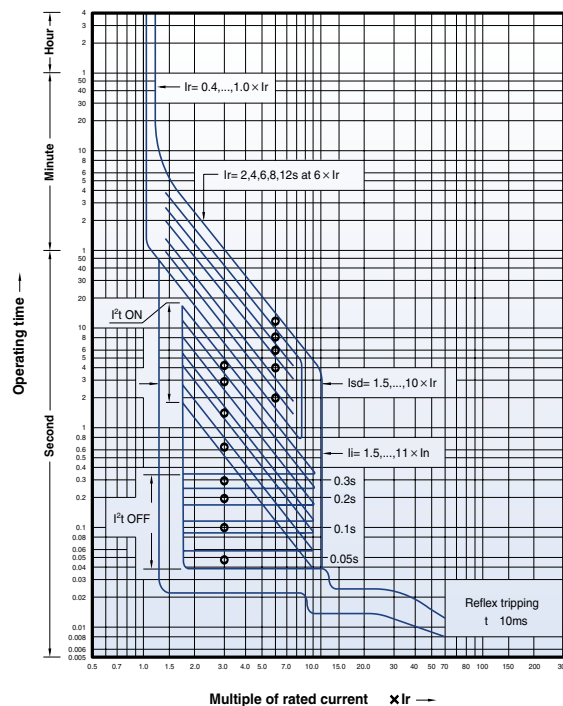


Characteristics curves


Susol

Specific let-through energy curves


220/240V Thermal stress

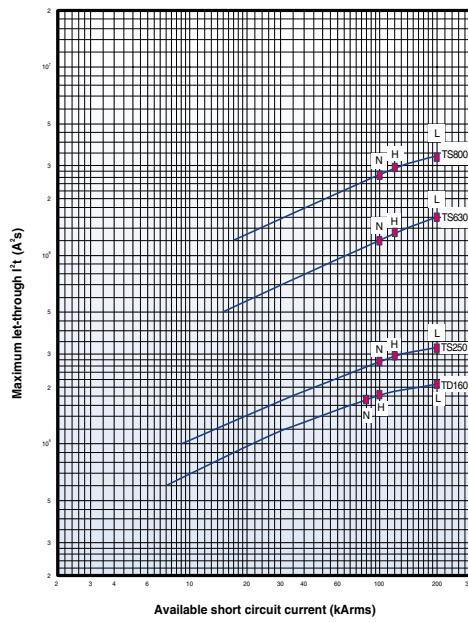

380/415V Thermal stress

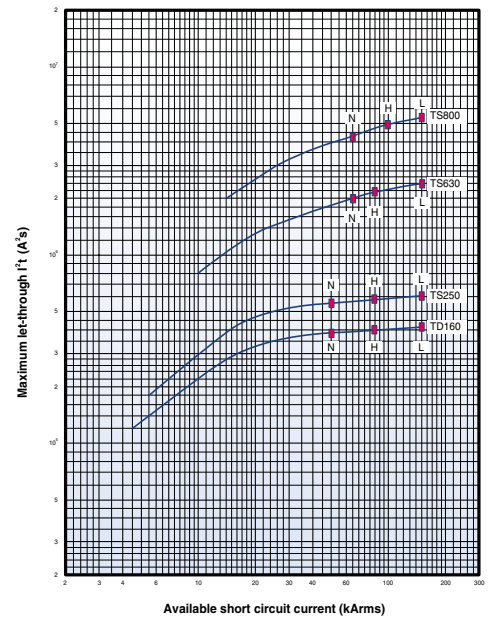

480/500V Thermal stress

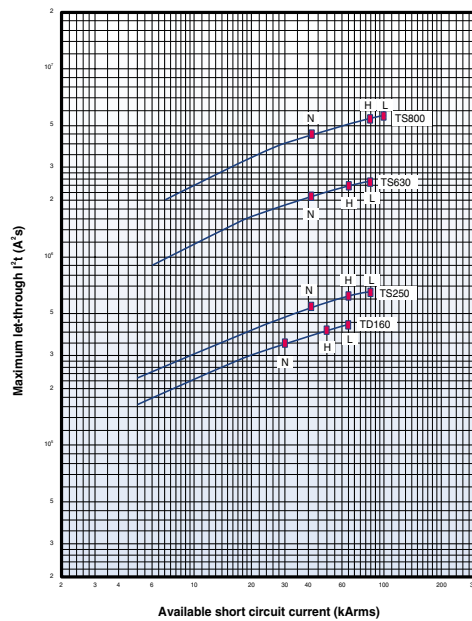


Characteristics curves


Susol

Current-limiting curves


220/240V Peak current

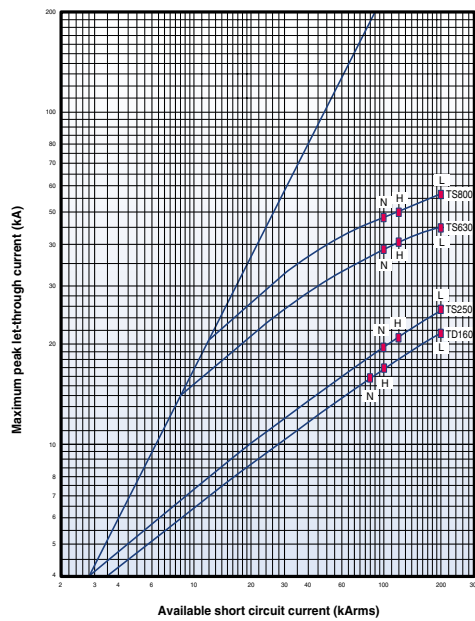

380/415V Peak current

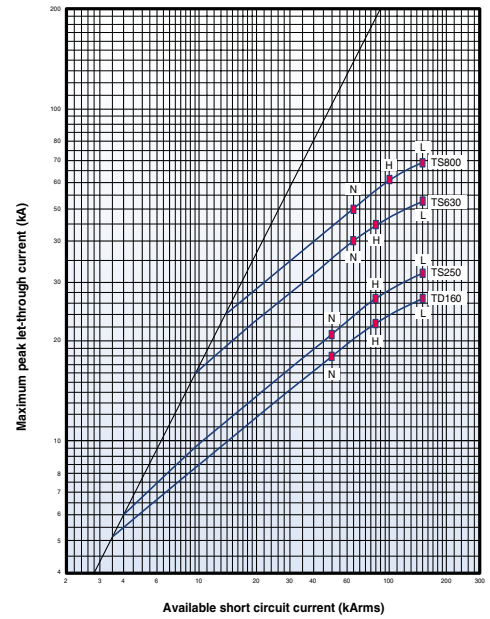

480/500V Peak current

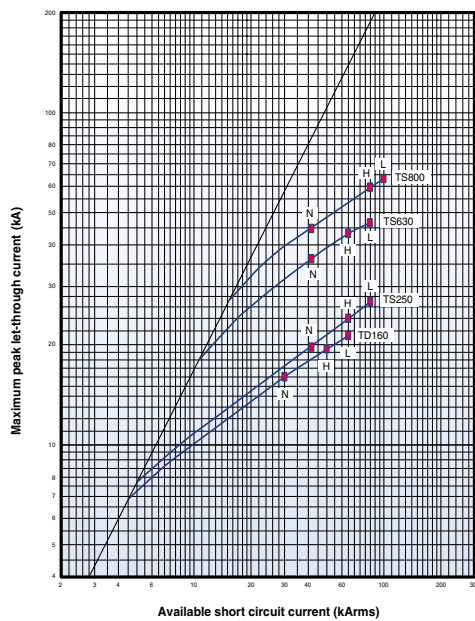

www.electrohamand.com